




## CL10XP9 SITE SPECIFICATIONS

- **BAY HEIGHT:** 10' minimum
- **BAY WIDTH:** 10' recommended
- **BAY DEPTH:** 24' recommended
- **POWER REQ.:** 208-230v Single Phase\*, 30-amp breaker
- **MIN. CONCRETE SPEC:** 4" thick, reinforced, free from cracks/seams, rated at 3500+ psi, cured at least 28 days

### SERVICE BAY LAYOUT

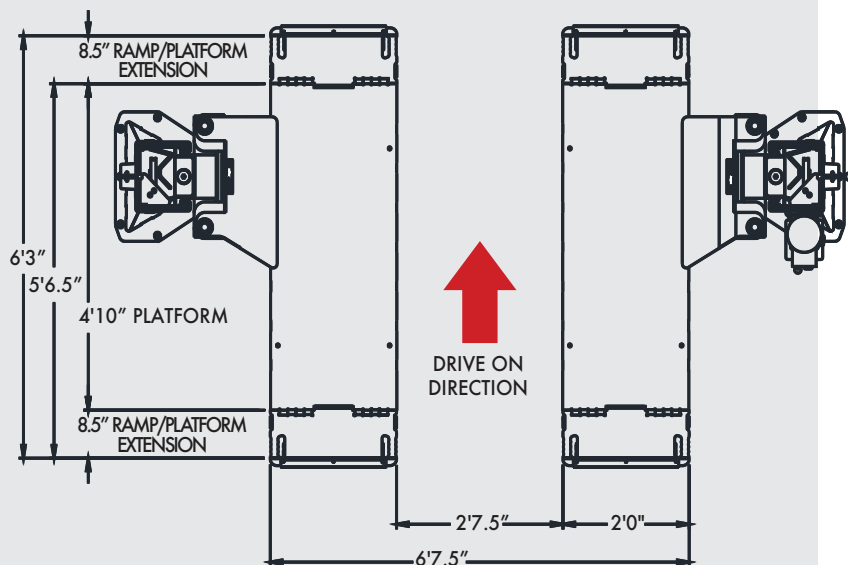

\*3-phase upgrade is available for purchase

Model Number	CL10-XP9	CL10-XP9-DPC	CL10-XP9-QC	CL10-XP9-DPC-QC
Lifting Capacity	10,000 lbs.			
Lifting Configuration	Drive-on Express Pad			
Rise Height	70"			
Overall Height	140"			
Overall Height (Cylinder Extended)	143"			
Overall Width	138.5"			
Drive-Thru Clearance	90"			
Floor to Overhead Switch	134.5"			
Platform Height	2.25"			
Platform Width	24"			
Platform Length	58" / 66.5" / 75"			
Inside Columns	110"			
Motor / Voltage	2HP, 208v-230v, 60Hz, 1Ph			
Speed of Rise	38 s		27 s	
Ceiling Height Required	12'			
ALI/ETL Certified	√	√	√	√
2' Height Extension Available	√	√	√	√
3' Height Extension Available	√	√	√	√
Featuring Quick Cycle	-	-	√	√
Featuring Dual Pendant Controls	-	√	-	√

Colors Available 

888-711-5438 | 619-286-543 | [www.aclifts.com](http://www.aclifts.com) | Fax: 619-330-2111

Email: [sales@aclifts.com](mailto:sales@aclifts.com) 720 N. Norma Street Suite D | Ridgecrest, CA 93555