




AMERICAN CUSTOM LIFTS

888-711-5438 | 619-286-543
 www.aclifts.com | Fax: 619-330-2111
 Email: sales@aclifts.com
 720 N. Norma Street Suite D | Ridgecrest,
 CA 93555



WAS112E SITE SPECIFICATIONS

Model No.	Figure	WAS112E	
Category	---	Two Post	
Lifting Capacity	---	11,000 lbs.	
Overall Height	A	141.50"	
Overall Width	B	138.50"	
Rise Height	C	73.75"	
Floor to Shut Off Height	D	135.00"	
Drive Thru Clearance	E	96.00"	
Arm Configuration	---	All-Symmetric	
Front Arm Reach	F	48.75"	
Rear Arm Reach	G	62.00"	
Lifting Pad Height	H	4.75"	
Width Inside Columns	I	115.00"	
First Lock Height	---	16.50"	
Locking Increments	---	4.00"	
Speed of Rise	---	55 Seconds	
Motor	---	2 HP	
Voltage	---	208/230 Single Phase	
Amps	---	30	
Ceiling Height Requirement	---	114.00"	
Floor Installation Requirement	---	Concrete, 3,000 PSI, 4" Thick, Steel Reinforced	

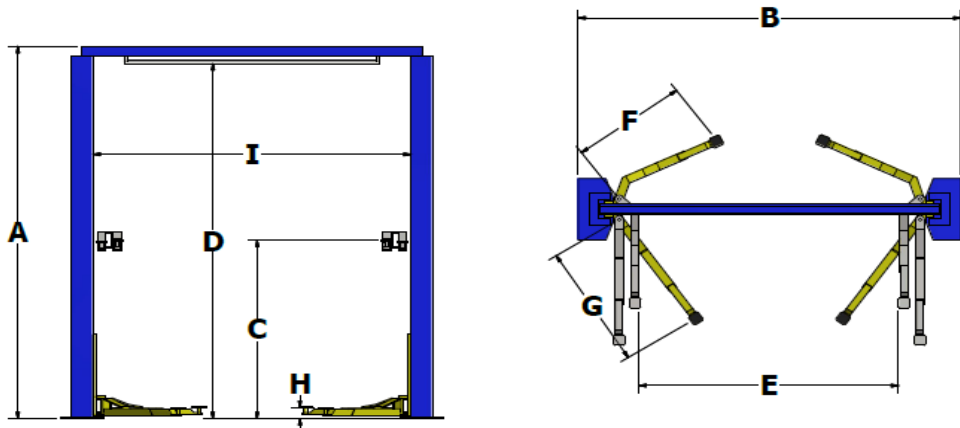

American Custom Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.

WWW.ACLIFTS.COM